


How to Install Milano Lockset

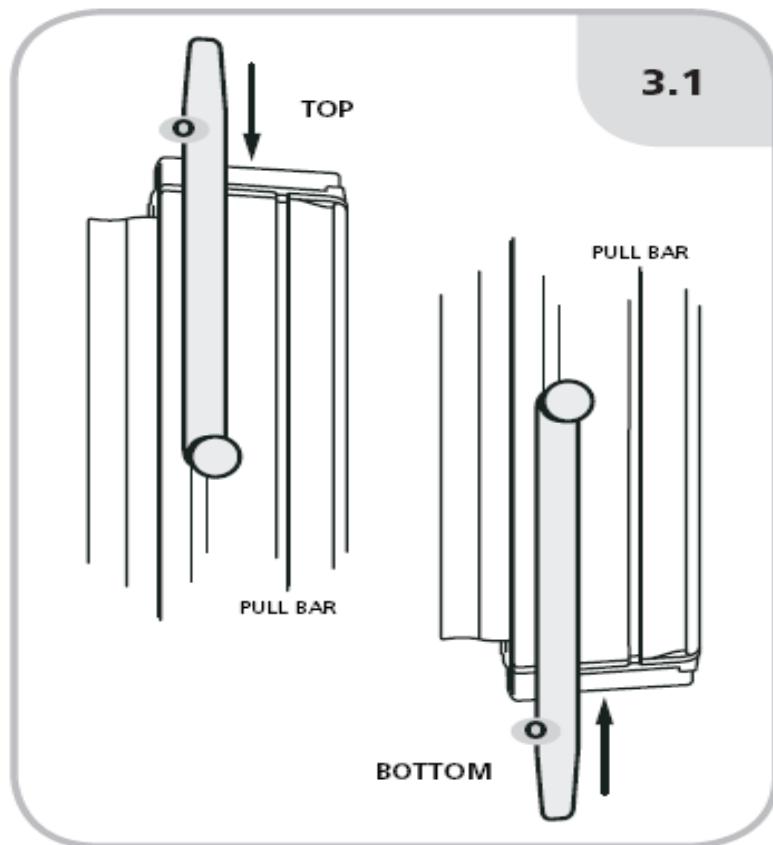

The Slide Bolt locks are installed on surface of the Milano pull-bar that faces inside. It uses the slot that is furthest away from the magnet.



1. If the unit is not already installed, skip to step 2. Slide pull-bar to the center of the opening. Tilt pull-bar and remove pull-bar from the top and bottom guide rails.
2. Remove top pull-bar end-cap from pull-bar.
3. Insert top slide bolt on to pull-bar as shown in Fig. 3.1 above. Re-install top pull-bar end-cap.
4. Utilizing the slot found on the bottom pull-bar end-cap (you do not need to remove the bottom pull-bar end-cap), slide bottom slide bolt on to pull-bar as shown in Fig. 3.1 above.
5. If the unit is already installed, tilt pull-bar and place it in the top and bottom guide rails.

After the unit is installed, install the Slide Bolt Retaining Cups on the top and bottom guide rails of the unit.

Pull the screen to the closed position so that the magnets connect.

RECESSED MOUNT INSTALLATIONS:

1. Slide the top and bottom bolts up and down respectively so that the pointed tips protrude over the guide rails.
2. Place a Retaining Cup over the pointed end of the top Slide Bolt and mark the spots on the top guide rail for the screws (see Fig 9.2)
3. Using a 1/16" drill bit, drill pilot holes.
4. Screw the Retaining Cup in place using two #4x3/8" Philips Pan-head Screws.
6. Repeat 3,4,5 for the bottom Slide Bolt. See Fig 9.1 above.

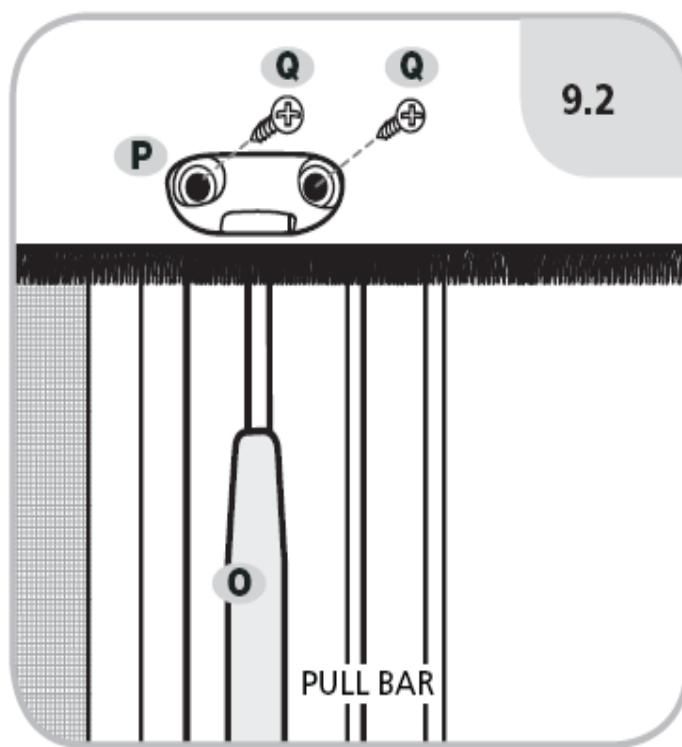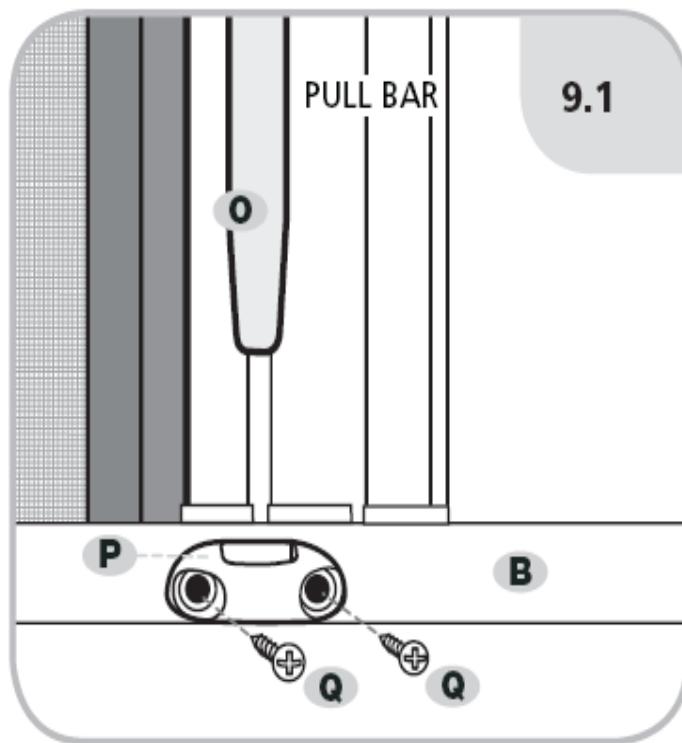

SURFACE MOUNT INSTALLATIONS: The Retainer Cups are not used in a surface mount installation. Drill a hole in the header and bottom sill of the door frame on which the unit is surface mounted that is large enough to receive the pointed end of the Slide Bolts.